

Helsinki 24.1.2000

ETUOIKEUSTODISTUS
PRIORITY DOCUMENT

REC'D 15 FEB 2000

WIPO

PCT



Hakija
Applicant

Borealis Polymers Oy
Porvoo

Patenttihakemus nro
Patent application no

982456

Tekemispäivä
Filing date

12.11.1998

Kansainvälinen luokka
International class

C08F

Keksinnön nimitys
Title of invention

"Method and apparatus for discharging polymerization reactors"
(Menetelmä ja laite polymerointireaktoreiden tyhjentämiseksi)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.

Pirjo Kaila
Tutkimussihteeri

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Maksu 300,- mk
Fee 300,- FIM

Osoite: Arkadiankatu 6 A Puhelin: 09 6939 500
P.O.Box 1160 Telephone: + 358 9 6939 500
FIN-00101 Helsinki, FINLAND

Telefax: 09 6939 5204
Telefax: + 358 9 6939 5204

1
2

METHOD AND APPARATUS FOR DISCHARGING POLYMERIZATION
REACTORS

Background of the Invention

Field of the Invention

The present invention relates to a method for continuous product discharge from polymerization reactors. In particular, the invention concerns a method of continuously withdrawing solid polymer powder from a fluidized bed polymerization reactor with high throughput. The present invention also concerns an apparatus for continuous withdrawal of polymer powder from a fluidized bed polymerization reactor.

Description of Related Art

A number of processes for preparing polymers in a fluidized bed reactor are known in the art. Such processes are described in e.g. EP Patent Specification No. 0 517 868, U.S. Pat. No. 4 543 399 and EP Patent Application No. 0 381 364. The processes are primarily designed for the production of polyethylene but they can also be modified for preparing other polyolefins, such as polypropylene. In the process described in EP Patent Specification No. 0 517 868 the fluidized bed reactor acts as a second reactor in a two-reactor train, in the other above-mentioned processes it is a stand-alone reactor.

Conventional fluidized gas phase reactors comprise an elongated reactor body generally having a vertical central axis. The monomers are polymerized in a fluidized bed above a fluidization grid located in the bottom end of the reactor body. A gaseous stream containing unreacted monomers is recycled through the fluidization grid to the fluidized bed, whereas the polymer product is withdrawn from lower part of the reactor above the fluidization grid.

The polymerization system of a gas phase reactor used for polymerization of α -olefins typically comprises the polymer together with a catalyst and a gaseous reaction medium. It can be maintained in the fluidized state by mechanically mixing or stirring the contents of the reactor and additionally or alternatively by blowing the monomer(s), i.e. the olefin(s), and/or an inert reaction medium (e.g. nitrogen and/or an easily volatile hydrocarbon) into it in a gaseous state. The monomer(s) and/or an inert reaction medium in liquid state can be

introduced into the polymerization system and the polymerization can be carried out while gasifying said monomer(s) and/or reaction medium. The unreacted monomer(s) and/or inert reaction medium can be partly or wholly liquefied and recycled in liquid state into the polymerization system, as disclosed in EP-A1 0 024 933.

5

Conventionally, the withdrawal of the polymer product from a gas phase reactor is carried out batch-wise. A typical batch discharge process consists of the following steps: When the surface level within the gas phase reactor rises as a result of polymerization, polymer powder is discharged through an on/off valve to an outlet tank. A part of the fluidizing gas entering the tank with powder is recycled by a compressor back to the fluidized bed. The degassed powder is recovered and optionally subjected to further processing.

10

By means of the batch-wise discharge system described above it is possible to remove not only the polymer powder but also lumps formed in the reactor, because the outlet nozzles of the system have a large diameter, generally much larger than required by the withdrawal of the powder.

15

There are, however, some serious disadvantages associated with conventional technology. The batchwise discharge is a rather complicated system. It comprises several phases and a number of on/off valves, which typically operate tens of times an hour. There has to be at least two discharge systems, in large plants even more. This feature makes the batch-wise discharge system rather expensive as an investment and also the maintenance is cost-consuming. The complexity of the system also makes it vulnerable; if the discharge system becomes clogged or there is a serious failure in the system, the whole plant has to be shut down.

20
25

Further, the batch-wise discharge is inflexible because it is difficult to increase its capacity when the capacity of the whole plant is increased. Instead, a major rise in the production capacity requires the addition of a new expensive discharge system.

30

As regards the operation of the system, it can be noted that there is a distinct fluctuation in the bed level when a batch of the polymer product is withdrawn from the reactor. This fluctuation influences the monomer concentration and, thus, also other parametres, such as the concentration of hydrogen and comonomers, which all taken together have a strong impact on the the quality of the polymer product.

35

The discontinuous operation of the outlet system also leads to a pulsating operation of the recycle gas compressor. This, again, leads to increased wear.

Some alternative systems for withdrawal of polymer powder from a fluidized bed reactor are also described in the art. Such processes are described in EP Published Patent Applications Nos. 0 006 288 and 0 245 043 and US Patent No. 4,495 337.

The last-mentioned document discloses a process for bottom drainage of a fluid-bed reactor, in which the reactor is provided not only with a vertical bottom pipe but also with a lateral evacuation pipe located above the distribution plate of the reactor. The side pipe makes it possible to evacuate a part of the polymer formed in the reactor. According to the reference, to empty the reactor, first all the fraction of polymer powder located above the level of the outlet pipe is discharged by means of the lateral pipe, then total drainage of the reactor is carried out via the vertical bottom pipe.

EP A1 0 006 288 and A1 0 245 043 disclose discharge systems which are discontinuously or continuously operated. In EP A1 0 006 288 the discharge is effected via a dipleg, which passes from the top of the reactor to a point near the bottom. The dip leg is connected to an on/off valve, which is opened intermittently. When the valve is open, a mixture of polymer and monomer is passed on to a cyclone in which most of the monomer vapour is separated from the polymer. The monomer can be recycled to the reactor via compressor.

EP A1 0 245 043 teaches an apparatus for degassing and pelleting polyolefins, in which there is an outlet nozzle which is equipped with a lock chamber placed between two valves activated alternately. The mixture of gas and solid particles, withdrawn from the reactor, is treated in a primary degasser for separating the solid phase from a part of the gas phase accompanying the particles. The gases containing monomers are recycled into the reactor by a pipe.

Although the prior art suggests that the above three alternative discharge systems can be not only periodically operated but also continuously, none of them is in fact adapted for such operation. It should be noted that the control valves described in EP A1 0 006 288 and A1 0 245 043 are actually intermittently operated which means that there is no continuous stream of polymer powder through the outlet nozzles. Thus, these systems are merely improved batch discharge systems, which have the same main disadvantages as described above. The discharge system of US 4,495,337 is, on the other hand, suitable for

draining of the whole content of the reactor rather than for allowing for continuous withdrawal of polymer powder.

Summary of the Invention

5

It is an object of the present invention to eliminate the problems related to the prior art of polymer powder discharge systems and to provide a simple discharge method with high throughput, which is capable of stabilizing fluidized bed polymerization reactor control and downstream equipment operation.

10

Another object of the present invention is to provide a discharge system with low investment cost and substantially reduced maintenance cost.

15

These and other objectives, together with the advantages thereof over known processes, which shall become apparent from the following specification, are accomplished by the invention as hereinafter described and claimed.

20

The present invention is based on the concept of continuously withdrawing polymer powder through a discharge pipe, simultaneously monitoring the surface level of the fluidized bed within a gas phase reactor, and controlling the flow of material through the pipe depending on the surface level so as to maintain an essentially constant bed level. To achieve this aim, the gas phase reactor is provided with an outlet nozzle which is equipped with a continuously operated control valve for the powder discharge. The control signal for the control valve comes from a fluidized bed level controller. The bed level is typically measured with a pressure difference or radio-active device.

25

The discharge system comprises an outlet nozzle, a control valve and a bed level indicator. Preferably the system further comprises a collecting vessel placed in communication with the outlet pipe for separating gas from solid material.

30

More specifically, the method according to the present invention is characterized by what is stated in the characterizing part of claim 1.

35

The apparatus according to the present invention is characterized by what is stated in the characterizing part of claim 28.

The present invention provides considerable advantages. Thus, the discharge of the polymer can be made truly continuous without any disturbance of the polymerization. The rate of withdrawn polymer can be flexibly adjusted depending on the progress of the polymerization and it can also easily be scaled up if the capacity of the reactor is increased.

5 Further, it has been observed that a mixture of gas and polymer can pass through the continuously operating control valve. Such a mixture can be used for pneumatically conveying polymer powder. Also it has been observed that less reaction gas is discharged than with batchwise systems.

10 Particularly well the continuous outlet system is suited to a process where the outlet from the gas phase reactor is either directly or indirectly fed into another gas phase reactor. This avoids the control upsets in the next gas phase reactor due to the sequential powder feed.

15 Next, the invention will be examined more closely with reference to the attached drawings and a detailed description.

Brief Description of the Drawings

20 Figure 1 shows in a schematical fashion a first embodiment of the invention comprising a fluidized bed reactor with an outlet nozzle, a pipe, a continuously operated control valve provided with means for flushing of the valve, and a processing section for separating gas containing unreacted monomers from the polymer powder; and

25 Figure 2 depicts in a schematical fashion a second embodiment of the present invention comprising a fluidized bed reactor with an outlet nozzle, a collecting vessel, a control valve operated under the control of a level indicator, and a processing section for separating gas containing unreacted monomers from the polymer powder.

Detailed Description of the Invention

30 According to the invention, the present method is used for discharging polymer from a continuously operated gas phase reactor, wherein at least one monomer is polymerized in a bed containing active catalyst formed by catalyst and polymer particles suspended in a fluid, said bed defining a fluidized bed level in said reactor. The catalyst can be fed into the gas phase reactor as a stream comprising polymer and active catalyst together with reaction medium. Such a stream can be obtained from a slurry reactor, such as a loop reactor.

35

The method comprises continuously withdrawing polymer powder from the reactor and adjusting the discharge rate of the polymer powder so as to maintain a constant bed level during polymerization. As mentioned above, the discharge rate of the polymer powder is adjusted by using a continuously operated control valve. Preferred examples of such continuously operated valves are ball valves, V-ball valves and hose valves.

The apparatus comprises an outlet nozzle communicating with the fluidized bed of the gas phase reactor, a collecting vessel placed in communication with the outlet nozzle for separating gas from solid material; a continuously operating valve for adjusting the amount of polymer powder withdrawn from the reactor via the outlet nozzle; and means for controlling the operation of the valve for adjusting the discharge rate of the polymer powder so as to maintain a constant bed level during polymerization. The continuously operating valve is preferably connected to the collecting vessel.

A first preferred embodiment of the invention is shown in Figure 1. In the drawing, the following reference numerals are used:

- 1. gas phase reactor
- 2. outlet nozzle of gas phase reactor
- 3. control valve
- 4. level indicator/controller
- 5. discharge line
- 7. collecting vessel
- 8. flush gas
- 12. valve regulating the flow of polymer powder
- 18. product receiver or second reactor
- 20. product receiver
- 21. compressor

As shown in the drawing, polymer formed in the reactor 1 is withdrawn from a point below the bed level, via an outlet nozzle 2 and a control valve 3 together with a sufficient amount of gas for conducting the polymer to a degassing vessel 18 or to a subsequent reactor. The operation of the control valve 3 is controlled by the level indicator/controlling means 4. The gas separated from the polymer powder in the degassing section is recycled after the separation of the polymer to the gas phase reactor, as indicated by the arrow, and/or to a recovery section.

The continuous withdrawal is preferably used as a single discharge system in case of a reactor wherein no lumps at all are formed or where the amount of lumps is small.

The formation of lumps can be reduced by adding various antistatic agents or by avoiding feeding raw catalyst to the gas phase reactor, as in a multistep process. A particularly preferred multi-step process is represented by the system disclosed in EP Patent Specification No. 0 517 868, which comprises in combination a loop reactor and a gas phase reactor.

Even in this embodiment, it is advantageous to place the outlet nozzle 2 at a point where no or practically no lumps are present. To that aim the polymer powder can be continuously withdrawn from a point above a fluidization plate, since the lumps tend to accumulate on the fluidization plate. When a gas phase reactor is used, wherein the fluidized bed comprises a mechanically mixed bed, the polymer powder is preferably withdrawn from said mixed zone.

In order to reduce the risk of clogging of the discharge system, the outlet nozzle can be provided with a grid (not shown) flush mounted at the reactor wall to prevent lumps from entering the pipe. Further, the discharge line 5 and the control valve 3 can be discontinuously backflushed with a flushing gas flow through gas conduit 8 to prevent clogging. Similarly, the control valve 3 can be adjusted to provide for pulsating operation to prevent clogging of the valve by a control means 4. Preferably, this is done by opening the valve fully for a short time and then turning it back to its normal position. This procedure is automatically repeated with specified intervals.

If it is not possible to avoid lump-forming or to reduce it to a minimum, as discussed above, it is preferred to combine the present continuous discharge system with a conventional batchwise system, as shown in Figure 1. In the present embodiment the batchwise discharge system is represented by a collecting tank 7, which is connected to the gas phase reactor via a gas conduit. By batch-wise withdrawal it is possible to prevent accumulation of lumps on the distribution plate of the gas phase reactor 1. In a process according to the present invention, the batchwise operated system can be designed for a substantially smaller capacity than conventionally and it can be operated less frequently, for example only once an hour or even only once a day. Generally one batchwise outlet nozzle should be enough for withdrawal of lumps.

Typically, if the reactor is provided with a discontinuous polymer discharge system, the ratio between the polymer powder continuously discharged from the reactor to polymer powder discharge via the batchwise operated system is about 1:1 to 10,000:1.

The degassing of the polymer powder takes place in at least one degassing vessel 18, wherein the pressure of the gas flow is decreased to remove the gas from powder. The degassing section 18 can comprise a product receiver 18 for separating gas from the polymer powder and a gas collecting vessel 20. The polymer powder is pneumatically conducted from the collecting vessel to the degassing vessel.

The pressure of the gas from the gas collecting vessel can be increased in a compressor 21 before the gas is recycled to a gas phase reactor.

Figure 2 shows another preferred embodiment for continuous withdrawal. The parts of the equipment are largely the same as in the previous embodiment, viz.:

- 31. gas phase reactor
- 32. outlet nozzle of gas phase reactor
- 33. control valve for gas
- 34. level indicator/controller
- 35. collecting tank
- 36. recycle line
- 37. screen
- 38. outlet nozzle to remove lumps from collecting tank
- 39. level indicator/controller
- 40. control valve to regulate the flow of powder
- 41. On-off valve for removal of lumps
- 43, 45 collecting tanks of degassing section
- 46 compressor

In the embodiment shown in Figure 2, the outlet nozzle 32 of the gas phase reactor 31 is combined with a separate collecting vessel 35, which can be used for separating lumps from the fluid comprising polymer powder and gas. The bed level of the gas phase reactor 31 is controlled by a recycle valve (control valve) 33 fitted in the recycle line 36 connected to the gas space of the collecting vessel. Gas is recycled to the upper part of the reactor above the fluidized bed and the bed height gives the necessary pressure difference for conducting the polymer and the gas to the collecting vessel 35.

The collecting vessel 35 is preferably provided with a separate level controller 39 and polymer is pneumatically conducted under the influence of the pressure of the collecting vessel 35 to a degassing vessel 43 or to a subsequent reactor. It is preferred to provide the collecting vessel with a screen 37 for collecting the lumps and with a separate discharge nozzle 38 for the lumps.

The operation of the degassing section 43 - 46 is similar to that of the first embodiment explained above.

5 The polymer continuously withdrawn can be directly or indirectly fed into another gas phase reactor.

10 Generally, it has not been deemed possible to achieve continuous discharge because in particular in a PE reactor there are formed considerable amounts of lumps and clogs and the size of a continuously operating outlet nozzle is so small that such lumps will eventually cause clogging thereof. By the present invention it is possible to avoid said problem.

15 The present invention can be used for producing homo- and copolymers from monomers selected from the group of C_2 to C_{16} olefins and mixtures thereof. Preferably the monomer is ethylene, propylene, 1-butene, 4-methyl-1-pentene, 1-hexene, a diene, or cyclic olefin, or a mixtures thereof.

The following non-limiting Examples illustrate the invention.

20 **Comparative example:**

A production scale gas phase reactor was operated at 85 °C temperature and 20 bar pressure with a bed level of 15 m as follows:

25 Polymer containing active polymerization catalyst was fed into the gas phase reactor from a loop reactor at a rate of 6 metric tons per hour. The feed rates of ethylene, hydrogen and 1-butene were adjusted so that desired concentrations in the gas phase reactor were reached. As a consequence, the polymer production rate in the gas phase reactor was 8 tons per hour and the polymer taken out of the reactor had an $MFR_{21} = 11$ and density = 947 kg/m³.

30 The polymer was collected from the reactor using a conventional, batchwise product outtake system, where the polymer was collected into a 3.7 m³ receiving tank. Two identical systems were used. The diameter of the outtake nozzle was 8 inches. The period between two successive outtakes was two minutes, i.e. four minutes for each individual system. During a normal operation the bed level was found to oscillate with a 20 cm amplitude. The reactor could be operated several days without a shut-down.

35

An experiment to operate the product outtake with its maximum capacity was made, and then the capacity was found to be 20 tons per hour.

Example:

5

A product outtake system according to the present invention was installed in the gas phase reactor of the Comparative example. The diameter of the nozzle was 2 inches (50 mm). Every minute the control valve was fully opened for a few seconds to prevent clogging of the valve. The conventional discontinuous outtake was set to operate once an hour to
10 remove any lumps from the reactor. No lumps were actually collected from the reactor during the test period and it was thus concluded that the operation frequency of the discontinuous outlet could have been even lower.

15

The conditions of the reactor were similar to the Comparative example. During the normal operation the bed level was found to oscillate with a 5 cm amplitude. The reactor was operated several days in a stable fashion until the test was interrupted.

In an experiment according to the Comparative example the maximum capacity of the outtake was found to be 45 tons per hour.

In the Claims

1. A method of discharging polymer from a continuously operated gas phase reactor, wherein at least one monomer is polymerized in a bed containing active catalyst formed by catalyst and polymer particles suspended in a fluid, said bed defining a fluidized bed level in said reactor, comprising
 - continuously withdrawing polymer powder from the reactor; and
 - adjusting the discharge rate of the polymer powder so as to maintain a constant bed level during polymerization.
2. The method according to claim 1, wherein the discharge rate of the polymer powder is adjusted by using a continuously operated control valve.
3. The method according to claim 2, wherein the continuously operated valve is a ball valve, a V-ball valve or a hose valve.
4. The method according to claim 2 or 3, wherein the polymer powder is withdrawn via an outlet nozzle connected to the control valve, and said nozzle is provided with a grid flush mounted at the reactor wall to prevent lumps from entering the pipe.
5. The method according to any of claims 2 to 3, wherein the operation of the control valve is adjusted by using a control signal obtained from a bed level controller.
6. The method according to any of claims 2 to 5, wherein the control valve is adjusted to provide for pulsating operation to prevent clogging of the valve.
7. The method according to any of the preceding claims, wherein polymer powder is continuously withdrawn from a point above a fluidization plate.
8. The method according to any of the preceding claims, wherein polymer powder is continuously withdrawn from a point below the bed level.
9. The method according to any of the preceding claims, wherein the discharge line and the control valve are discontinuously backflushed with a flushing gas flow.
10. The method according to any of the preceding claims, comprising

- using a gas phase reactor having a mechanically mixed zone of the fluidized bed, and
- continuously withdrawing polymer powder from said mixed zone.

5 11 The method according to any of the preceding claims, wherein polymer powder is also separately withdrawn from the reactor using a discontinuous discharge device.

10 12. The method according to any of the preceding claims, wherein the polymer powder is withdrawn together with gas from the reactor, the gas is separated from the polymer powder, and the separated gas is recycled into the reactor.

15 13. A method of discharging polymer from a continuously operated gas phase reactor, wherein at least one monomer is polymerized in a bed containing active catalyst formed by catalyst and polymer particles suspended in a fluid, said bed defining a fluidized bed level in said reactor, comprising

- continuously withdrawing polymer powder from the reactor;
- feeding the withdrawn polymer powder into a collecting vessel, wherein lumps are separated from finely-divided polymer powder and at least a part of the gas is separated from the solid material; and
- 20 – adjusting the discharge rate of the polymer powder so as to maintain a constant bed level during polymerization.

25 14. The method according to claim 13, wherein the separated gas is recycled into the reactor, said collecting vessel being provided with return valve for adjusting the gas flow recycled to the reactor.

15. The method according to claim 14, wherein the return valve is controlled by the fluidized bed level of the reactor.

30 16. The method according to claim 15, wherein the polymer level in the vessel is controlled using a continuously operating control valve.

17. The method according to claim 16, wherein the control valve is adjusted to provide for pulsating operation to prevent clogging of the valve.

35

18. The method according to claim 16 or 17, wherein the line is discontinuously flushed

with a flushing gas flow.

19. The method according to any of the preceding claims, wherein the outlet pipe is connected to a screen to separate lumps.

5

20. The method according to any of claims 13 to 19, wherein the collecting vessel is provided with a screen for separating lumps.

10

21. The method according to any of the preceding claims, wherein the catalyst is fed into the gas phase reactor as a stream comprising polymer and active catalyst together with reaction medium.

22. The method according to claim 21, wherein the catalyst is fed into the gas phase reactor from a slurry reactor.

15

23. The method according to claim 22, wherein the slurry reactor is a loop reactor.

24. The method according to any of the preceding claims, wherein the monomers are selected from the group of C_2 to C_{16} olefins and mixtures thereof.

20

25. The method according to any of the preceding claims, wherein the monomer is selected from the group of ethylene, propylene, 1-butene, 4-methyl-1-pentene, 1-hexene, dienes, and cyclic olefins, and mixtures thereof.

25

26. The method according to any of the preceding claims, wherein the polymer that is continuously withdrawn is either directly or indirectly fed into another gas phase reactor.

30

27. The method according to any of claims 13 to 26, wherein the collecting vessel is connected to a gas separator, said polymer powder being pneumatically conducted from the collecting vessel to the gas separator.

35

28. An apparatus for discharging polymer from a continuously operated gas phase reactor, wherein at least one monomer is polymerized in a bed containing active catalyst formed by catalyst and polymer particles suspended in a fluid, said bed defining a fluidized bed level in said reactor, said apparatus comprising

— an outlet nozzle communicating with the fluidized bed of the gas phase reactor,

- a collecting vessel placed in communication with the outlet nozzle for separating gas from solid material;
- a continuously operating valve for adjusting the amount of polymer powder withdrawn from the reactor via the outlet nozzle; and
- 5 – means for controlling the operation of the valve for adjusting the discharge rate of the polymer powder so as to maintain a constant bed level during polymerization.

29. The apparatus according to claim 28, wherein the continuously operating valve is connected to the collecting vessel.

10

30. The apparatus according to claim 28 or 29, wherein the collecting vessel comprises a gas space which is connected to the gas phase reactor via a gas conduit.

15

31. The apparatus according to any of claim 28 to 30, wherein the collecting vessel comprises a grid for collecting the lumps and a separate discharge nozzle for the lumps.

Abstract

A method and an apparatus of discharging polymer from a continuously operated gas phase reactor, wherein at least one monomer is polymerized in a bed containing active catalyst formed by catalyst and polymer particles suspended in a fluid, the bed defining a fluidized bed level in said reactor. The invention comprises continuously withdrawing polymer powder from the reactor; and adjusting the discharge rate of the polymer powder so as to maintain a constant bed level during polymerization. By means of the invention the discharge of the polymer can be made truly continuous without any disturbance of the polymerization. The rate of withdrawn polymer can be flexibly adjusted depending on the progress of the polymerization and it can also easily be scaled up if the capacity of the reactor is increased.


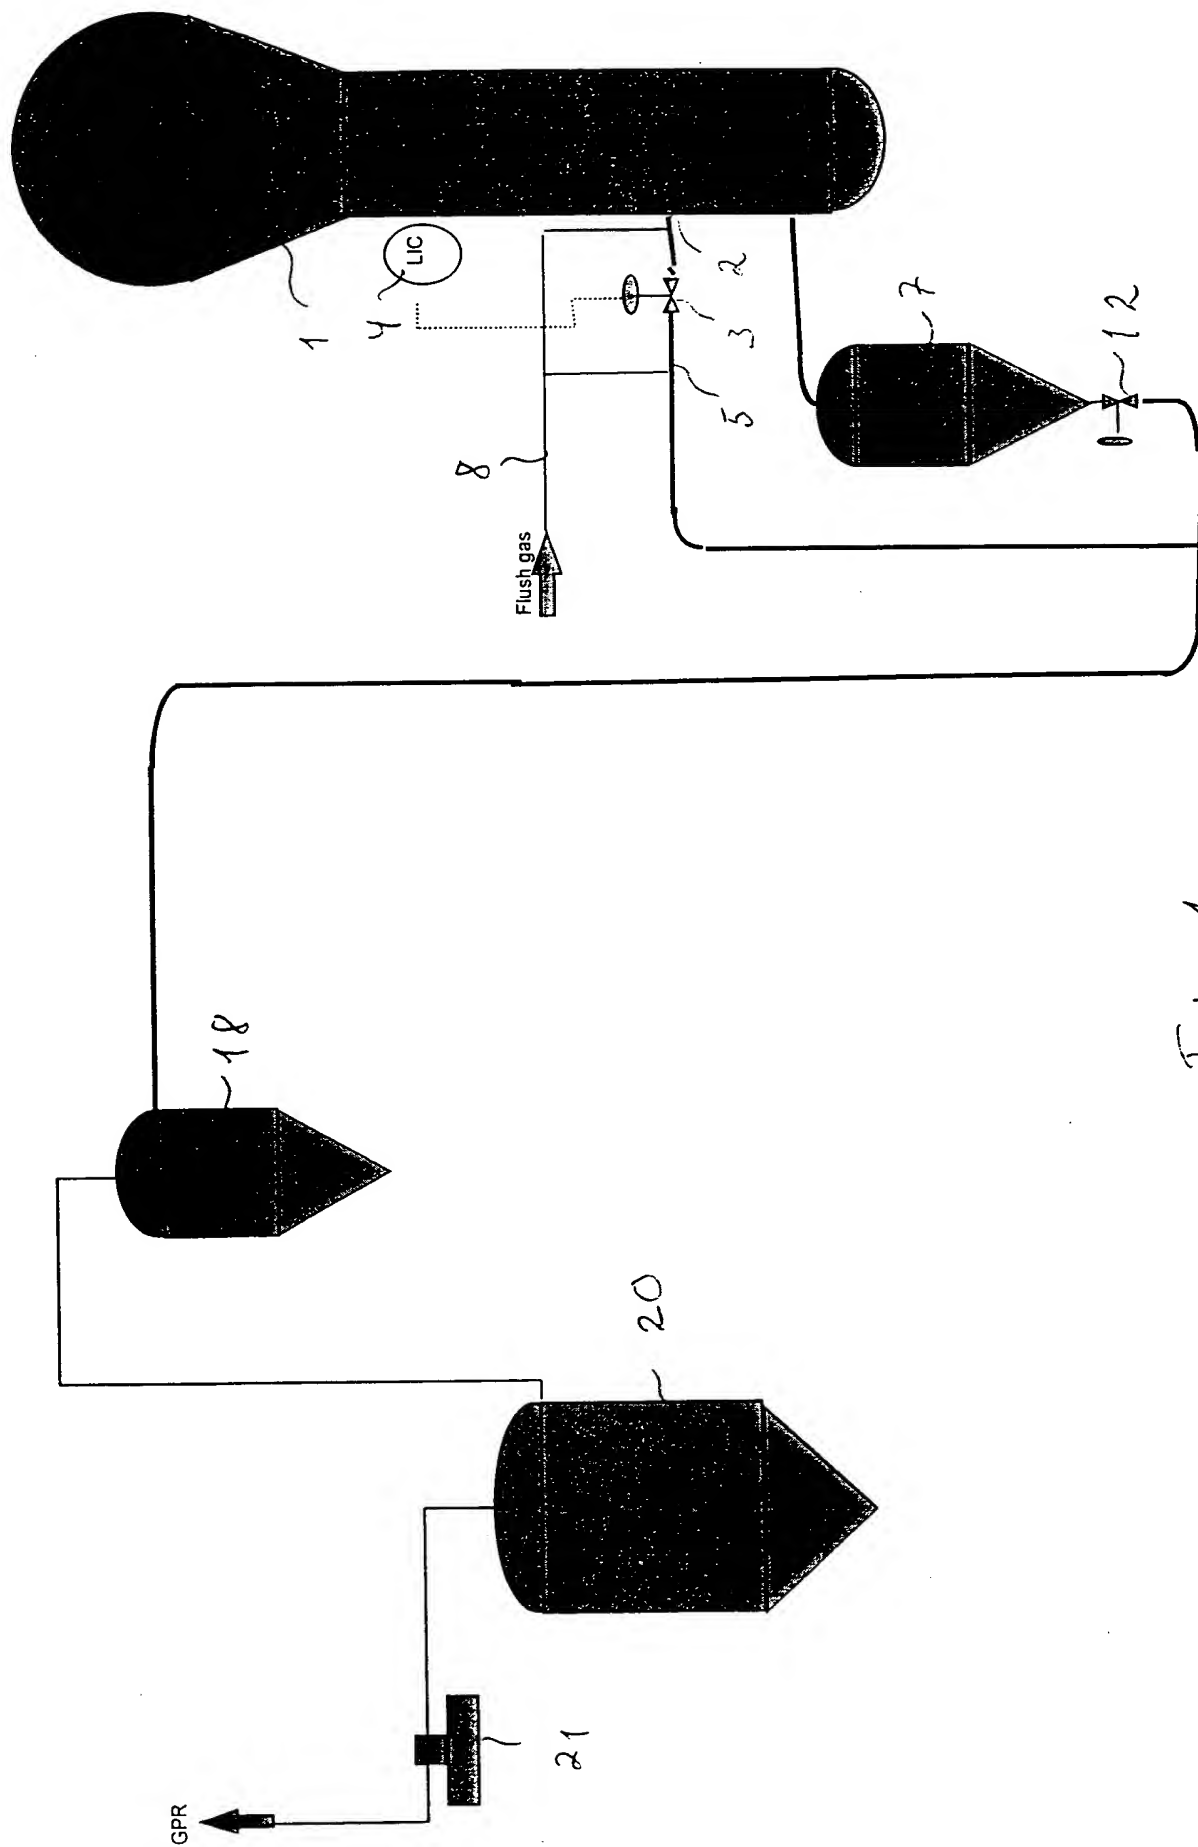


Fig. 1

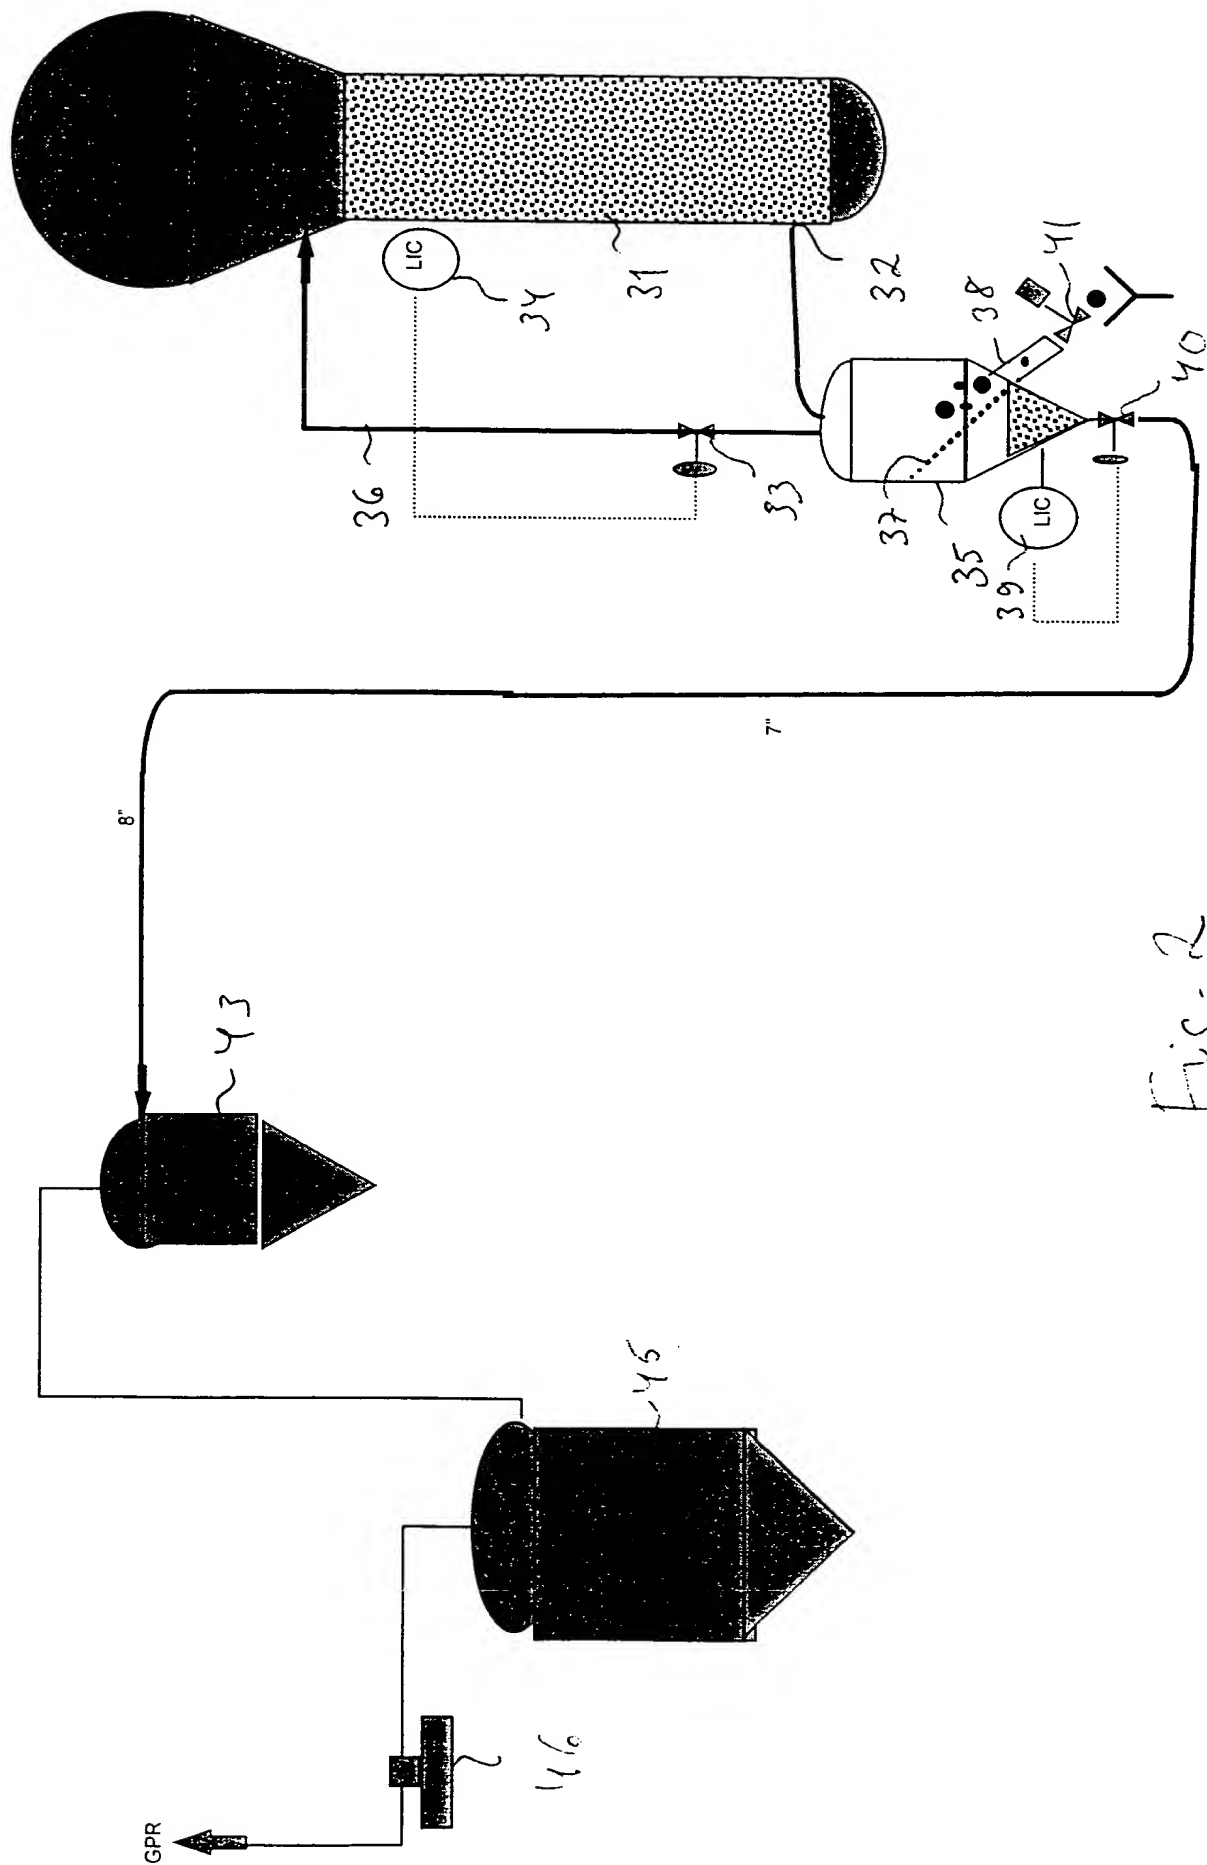

28